



➤ DIN 46391

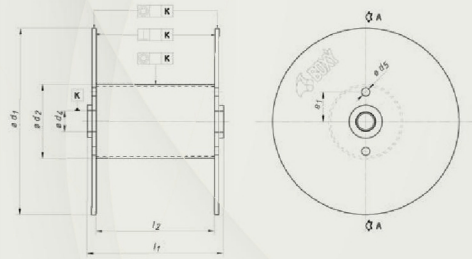

d_1	d_2	d_3	d_4	e_1	l_1	l_2						
710	355	80	30	100	550	400						
800	400		40									
900	450		50	160	710	560						
1000	500				900	710						
1250	630											
1400	710	125	65	300	1120	900						
1600	800											
1800	1000											
2000	1000											
	1250						1360	1120				
2240	1120	140	65	400	1450	1220						
	1400						1360	1120				
	1250						1450	1220				
2500	1400						1650	1380				
	1600											
2800	1800	200	80	1000	2240	1800						
3000	1800						600	2000	1600			
	2000											
3150	1800											
	2000											
	2000											
3350	2000	200	80	1000	2500	2000						
	2360											
	2000											
	2360											
3750	2360											
	2650											
4000	2650											
	2800											
4250	2650											
	2800											
4500	2800											
	3000											

➤ DIN 46395

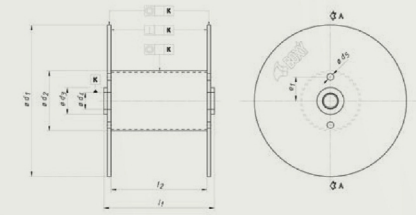

d_1	d_2	d_3 (max)	d_4	d_5 hole/pin	e_1	l_1	l_2
100	40	50	28	8-16	40	80	63
125	50					95	80
160	63					118	100
200	80	71	36	71	150	125	
	100				125	100	
250	100				190	160	
	125				150	125	
					236	200	
315	125	112	56	16-28	190	160	
	160				236	200	
355	140				265	224	
	180				215	180	
400	160				300	250	
	200	236	200				
450	180	160	80	28-40	335	280	
	224				265	224	
500	200				375	315	
	250				300	250	
					425	355	
560	224	200	100	40-63	335	280	
	280				475	400	
630	250				375	315	
	315				530	450	
710	355				600	500	
800	400	250	125	300	670	560	
900	450				750	630	
1000	500				850	710	
1120	560				950	800	
1250	630				1060	900	
1400	710	280	140	300	1180	1000	
1600	800				1320	1120	
1800	1000				1500	1250	
2000	1120				1700	1400	
2240	1250				1900	1600	
2500	1500				2120	1800	
2800	1800						